



As the leader in hi-speed floor care, Amano Pioneer Eclipse realized conventional floor strippers could not produce acceptable results after lengthy periods between stripping operations. **Flash55** addresses these concerns and produces excellent results even after numerous scrub and re-coats.

## DIRECTIONS

Read all directions and Safety Data Sheets (SDS) before using.


- Mix stripper with cold water per the following dilutions:  
Heavy coating removal: 1:4 (32 US oz per gallon/250 ml per 1 liter of water)  
Normal coating removal: 1:6 (21.5 US oz per gallon/166 ml per 1 liter of water).  
Light coating removal: 1:8 (16 US oz per gallon/125 ml per 1 liter of water).
- Apply solution liberally to the floor and allow to soak for 10 minutes ensuring the solution does not dry.
- Scrub floor with automatic scrubber or stripping machine. Pick up dirty solution with automatic scrubber or wet vac.
- Rinse thoroughly with clean water and allow floor to dry completely before applying any finish.

Note: Test floor for color fastness in an inconspicuous area.

## PRODUCT INFO

<b>Product Code</b>	516FS	516MP
<b>Volume</b>	2.50 US gallons	1.06 US gallons
<b>Shipping Package</b>	2 x 2.5 gallons	4 x 1.06 gallons
<b>Pallet Quantity</b>	48	48

## SURFACES

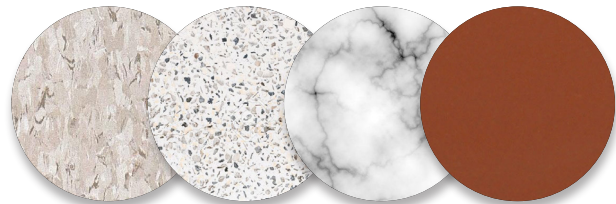

VCT

TERRAZZO

MARBLE

QUARRY  
TILE

## TECHNICAL DATA

<b>Description</b>	Fast acting floor stripper
<b>Appearance</b>	Clear blue liquid
<b>Viscosity (Brookfield)</b> @ 68°F (20°C)	<10 centipoise
<b>Flash Point</b> ASTM D56-05 (2010)	150°F (66°C)
<b>VOC</b> 40 CFR Part 59 Subpart C	54.5% (as supplied) 10.5% (1:4) 5.8% (1:8)
<b>Fragrance</b>	Floral fragrance
<b>Shelf Life</b> ASTM D1791-93 (2008)	2 years
<b>Density</b> ASTM D1475-98 (2008)	8.0 lb/gal @ 68°F 0.96 kg/L @ 20°C
<b>Container</b>	2.5 US gal/9.5 L (FS packaging) 1.06 US gal/4 L (MP packaging)